



IMAGING & ARCHIVES

Tested System: ID#:208

Printer: Canon iPF8100

Inks/Colorants: Canon OEM Lucia inks for imagePROGRAF x100 series

printers

Media: Kernow Coatings Ltd – St. Ives Fine Art 400gsm 100% Cotton,

Full Panama Woven Cloth

Coating(s): no additional coating

Sample #: AaI_20100913_SN028

Testing Status: 160 Megalux hours total light exposure

Testing Is ongoing, next update on approximately OCT 05, 2014

Conservation Display Rating (CDR)

Lower limit: passing – evaluation is ongoing *Upper limit:* passing – evaluation is ongoing

Note: a CDR with narrow range (typically less than 2:1) indicates relatively even overall fading of the image. A wide range indicates faster fading in certain local colors/tones prior to general fading of most colors/tones in the entire image. Compare ratings for different systems directly and/or use the table on page 2 to estimate time (years) on display.

* Please read document AaI_2009_0118_TA-01.pdf, "An Overview of the AaI&A Conservation Display Ratings", located on the Documents page of the AaI&A website for further explanation of the Conservation display ratings.

This report has been prepared for the exclusive use of members of Aardenburg Imaging & Archives. Members may share this information with other members, friends, colleagues, and individual clients. It may also be distributed to groups for educational purposes (classes, lectures, educational seminars. etc). However, all contents including but not limited to Conservation Display Ratings may not be posted to web sites and may not be reproduced or distributed for corporate research, marketing, or other promotional purposes without written permission from Aardenburg Imaging & Archives.

copyright ©2014


http://www.aardenburg-imaging.com



About this Report

This report contains light fastness information about a sample test print produced by a specific digital printing system. "System" refers to all hardware, software, and materials used to make the finished print. The hardware, software, material components, and printmaker's skills contribute to the final image quality and image permanence. The tested sample is made with current or recently discontinued stocks of commercially available products unless otherwise stated. Each sample has been prepared by Aardenburg Imaging & Archives or one of its members in accordance with customary print making practices unless otherwise noted. The sample may also contain additional finishing materials such as overcoats and laminates which are also noted when used. Finally, the sample has been tested under standardized conditions that are defined on the Sample Description page (see page 4). AaI&A makes every effort to ensure but cannot guarantee that the samples are properly identified and documented and that test results are accurate. For this reason, AaI&A also strives to test independently produced sample replicates in order to increase sampling confidence and to provide information on process variability. Please compare the results in this report to replicate test samples when the data become available.

Understanding this Report



The magnitude and visual appearance of fading depends not only on the chosen printing system but the chosen image as well. In other words, different images are comprised of different colors, and the fading relationships between those colors dictate how the image will look as it fades. The sample print in this test report was made by reproducing the digital image shown on the left. It contains 30 standard colors. 24 of the colors are colorimetrically matched to the Macbeth ColorChecker™ chart viewed under D50 illumination. The remaining six colors supplement the ColorChecker™ array with four additional skin tone colors, one patch for paper white, and another for maximum black. The additional colors also round out the distribution of CIELAB L* (lightness) values in the test target.

Information about the fading characteristics of the product is provided in three ways:

- 1) You can visually assess the fading. The target images reproduced in this report are digitally reconstructed from the spectrally measured color data rather than scanning or otherwise reproducing the physical print by conventional techniques. This method ensures a colorimetrically accurate representation of the print appearance as the print fades. A calibrated monitor is recommended to experience the best possible reproduction of the test sample appearance. The side-by-side "before and after" presentation of the target images simulates looking at a perfect copy of the unexposed original print along side the same print after light exposure. You can also use Adobe Reader's full screen mode to cycle through the pages and "animate" the fading.
- 2) I* Color and tonal accuracy scores are reported. This report includes I* metric scores that compare the color and tonal relationships of the light exposed samples to the color and tonal relationships existing in the original print prior to light exposure. Perfect I* scores of 100% can be approached when no significant fading occurs. Average scores above 90% generally indicate excellent retention of original quality, 80% good, 70% fair, etc., but your conclusions may vary depending on your image quality requirements. I* color rates the retained color accuracy (hue and chroma) while I* tone rates the retained tonal accuracy (lightness and contrast). The score is on a percentile scale where 100% is a perfect match between the comparison image (e.g., "after" light exposure) and the reference image (e.g., "before" any light exposure). 0% I* color means no color accuracy is left. 0% I* tone means essentially no tonality remains and all image information content is lost. Negative I* values have significance as well and contribute to the average I* score when they occur. Negative I* color values mean false color has occurred, for example, when a skin tone turns green or a neutral gray becomes distinctly colorful. Negative I* tone scores mean visual contrast between colors has become inverted (i.e., like the tonal relationships in a photographic film negative). Serious image quality problems must arise before false colors and/or tones appear. For more information on the I* metric, please refer to the AaI&A web site.
- 3) Color changes are also reported using the classic color difference model, ΔE . Note that ΔE values lose perceptual scaling significance when they become large (e.g., > 15). Also, the ΔE equation does not unambiguously measure changes in image contrast. This limitation is generally not a problem for paints and textiles, but can be a serious oversight when evaluating photographic images. Properly tracking changes in image contrast was a major reason behind the development of the I* metric.

Table to Convert Megalux-hours of Light Exposure to estimated "Years on Display"												
Indoor Light Levels for Print Display		Multiply										
Light Exposure	Description	Mlux-hrs by	10	20	30	40	50	60	70	80	90	100
≤ 10 Lux 24 hours per day	Interior rooms, storage areas, or hallways without win- dows, illuminated sparingly by artificial lighting	11.4	114	228	342	457	571	685	799	913	1027	1142
50 Lux 12 hours per day	"Museum Standard" display condition	4.6	46	91	137	183	228	274	325	365	411	457
120 Lux 12 hours per day "Kodak Display Years" (1)	Average home illumination level for photos is ~ 60 lux. 90% of all displayed photos do not exceed 120 lux (1).	1.9	19	38	57	76	95	114	133	152	171	190
228 Lux 12 hours per day	Relatively bright home or office. Note the simple 1:1 relationship between "years on display" and Mlux-hr values at this condition.	1.0	10	20	30	40	50	60	70	80	90	100
450 Lux 12 hours per day "WIR Display Years" (2) Also equals 500 lux for 11.8 hours per day	A bright home or commercial office building illumination level is 200-500 lux. Also, good illumination for color critical viewing and color matching tasks begins at about 500 lux.	0.5	5	10	15	20	25	30	35	41	46	51

Light levels commonly encountered in the real world fluctuate widely throughout indoor print display environments and produce large variations in how long it takes for artwork to acquire light-induced damage. Use this table as a guide to estimate how many "years on display" (denoted in red text) it takes to accumulate the light exposure test dosage. Review the test results to decide which Megalux-hour dose has caused fading to your level of concern (e.g., just noticeable, easily noticeable, objectionable, etc.). Then choose the print display description that best represents how your print is likely to be displayed. You may want to obtain a lux meter and make some measurements in your own display environment!

Note that as the years of display time increase, light-induced fading can be eclipsed by other serious aging mechanisms such as fading and/or staining caused by heat, humidity, and air pollutants. Mould damage can also occur at high humidity. Even when colorants remain water fast, direct contact with liquids may result in physical deformation and staining of the substrate. Also, temperature and especially humidity cycling can cause physical cracks and/or flaking, etc. Handling damage such as scratching, abrasion, tears and creases, and catastrophic damage by smoke, fire, flood, etc., also degrade print quality over time. Thus, as illumination levels are reduced other forms of degradation take on greater proportion of risk and may appear in shorter time intervals.

- (1) Eastman Kodak cited this exposure condition with a 90% confidence limit as a rationale for estimating print fading times of traditional color photo materials in typical home display environments. For light fading claims regarding its newer line of pigment-based inkjet printers, Kodak adopted the higher level of 450lux/12 hours per day which is also used by Wilhelm Imaging Research, Inc. (See below).
- (2) Wilhelm Imaging Research (WIR) standardized its light fastness ratings on 450 lux for 12 hours per day in order to estimate the years on display necessary to reach "easily noticeable" fading. This average daily light exposure dose (at 75°F/60%RH assumed temperature and humidity levels) used in conjunction with WIR's visually weighted densitometric endpoint criteria set V3.0 became a de facto industry standard during the first decade of the 21st century in the absence of a published International Standards Organization (ISO) test standard. However, the WIR V3.0 visual criteria set used to predict "easily noticeable fade" was designed for traditional 20th century silver—halide color photofinishing processes. It is not well suited to the evaluation of modern digital media. Nevertheless, the WIR assumed daily light exposure dose is one of many commonly encountered light exposure conditions existing within the range of real world picture display locations.

Sample Description

Sample # AaI_20100913_SN028 Batch #: I1a

Printer: Canon iPF8100

Ink: Canon OEM Lucia inks for imagePROGRAF x100 series printers

Media: Kernow Coatings Ltd – St. Ives Fine Art 400gsm 100% Cotton, Full Panama Woven Cloth

Coating(s): no additional coating

Test Print Prepared by: AaI&A

Printed:September 17, 2010Initial Print colors measuredSeptember 19, 2010Test Started:September 19, 2010

Test Image: AaI_StandardColorSet(v2)forSRGB.tif

RIP:Driver settings: CS3/Canon 16 bit plugin for Photoshop, Mac OS 10.6.4, high accuracy 600ppi,

highest gradation 16 bit, high(high precision), unidirectional "on" adjustment (NCA)

Media Setting Canvas Matte

Profile: AaI_iPF8100_Kernow St Ives.icc Rendering intent: perceptual

Profile type: custom

Paper White Color (UV-included versus UV-excluded)

Optical Brighteners Present?	L*		a	*	b*			
no								
	UV inc	UV exc	UV inc	UV exc	UV inc	UV exc		
Media Whitepoint Color	94.5	94.4	-0.1	-0.1	2.6	2.6		
	UV-inc/UV-exc ΔL*, Δa*, Δb* respectively							
	0	.1	0	.0	0.0			
	Calculated differences, especially for Δb*, indicate the role and							
	magnitude of fluorescence on original paper color							
Maximum Printed Black	L*	a*	b*	Optical	Density	(Dmax)		
Maximum Printed Black	22.3	0.8	2.0		1.44			

Light source: Phillips Colortone F40T12/C50 – 5000 K full spectrum fluorescent. Color

rendering Index (CRI) =92), soda lime glass filtered

Light Exposure Cycle: 8 hours on, 4 hours off, twice per 24 hours

CIELAB measurements: D50 2° observer, Xrite Gretag/Macbeth Spectrolino/Spectroscan

Average Illuminance during "on" cycle: 11254 Lux


Average Temperature: 23.3 °C over full test duration, 24.7 °C during light exposure. **Average Relative humidity:** 56.7%RH over full test duration, 56.5%RH during light exposure.

Description by Kernow Coatings Ltd for St Ives Fine Art

St Ives is a 400gsm 100% Cotton, Full Panama woven cloth. The Full Panama, double-warp, double-weft specification accentuates a fine, heavy and luxurious texture, while delivering excellent tear-strength and resistance to deformation.

The fabric is of the highest quality, even and seedless, to minimise 'surprises' (!) when printing.

Our expectation is that major users will be galleries and museums looking to reproduce antique images, high end art reprographers, creative photographers and craft specialists requiring as heavy a fabric as feasible through an inkjet printer.

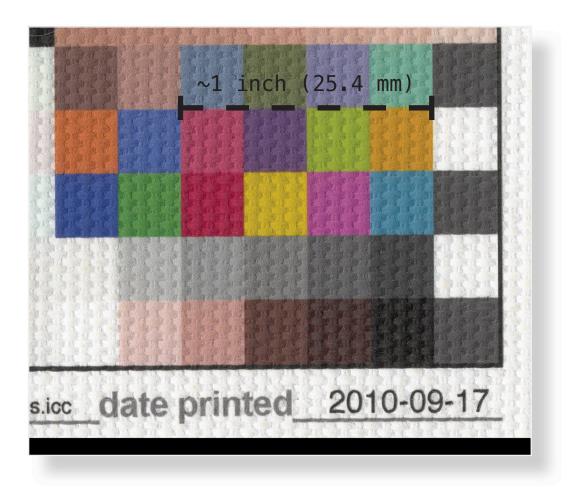

Surface Texture of Kernow Coatings Ltd - St. Ives Fine Art 400gsm 100% Cotton, Full Panama Woven Cloth. Printed with Canon iPF8100, Canon Lucia for imagePROGRAF x100 series ink.

2011-03-24: Kernow Coatings Ltd markets the St. Ives Fine Art 400gsm 100% Cotton, Full Panama Woven Cloth and other inkjet printable fabrics under the tradename: "The Kernewek Range of Fine Fabrics".

The website is:: http://kernewekfinefabrics.com.

Contact information is:

Kernow Coatings Ltd.

Kernick Rd., Penryn, Cornwall TR10 9DQ Phone: +44(0)1326 373147

Fax: +44(0)1326 376614 e-mail: kc@sensitisers.com

Notes/Comments:

In the United States, the Kernewek line of fine fabrics is available from:

FreeStyle Photographic Supplies, Inc

800 292-6137

http://www.FreestylePhoto.biz

However, Freestyle has renamed the Kernewek line of Fine Fabrics as the "Arista Americana Collection". The renaming key is as follows:

Kernewek	Arista Americana
St Ive's 400gsm =	Monument Valley 400gsm
Newlyn 260gsm =	Yosemite 260gsm
Trace Design 160com	Duchmara 160com


Tresco Design 160gsm = Rushmore 160gsm

Marazion 260gsm = Sedona 260gsm

Tintagel 140gsm = Yellowstone 140gsm

Graphs:

Canon iPF8100, Canon OEM Lucia inks for imagePROGRAF x100 series printers, Kernow Coatings Ltd – St. Ives Fine Art 400gsm 100% Cotton, Full Panama Woven Cloth, no additional coating

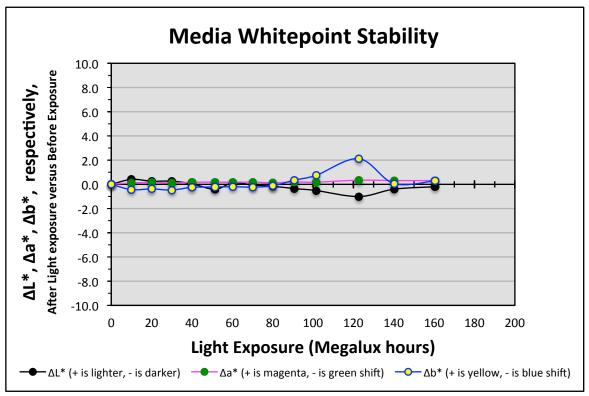

Canon iPF8100, Canon OEM Lucia inks for imagePROGRAF x100 series printers, Kernow Coatings Ltd – St. Ives Fine Art 400gsm 100% Cotton, Full Panama Woven Cloth, no additional coating

